



# V-EDGE™ 6 m Leading Edge SRL



*Specifically engineered and tested for use at foot-level tie off, the V-EDGE SRL meets EN 360: 2002 & VG11 sheet 60 Leading Edge requirements.*

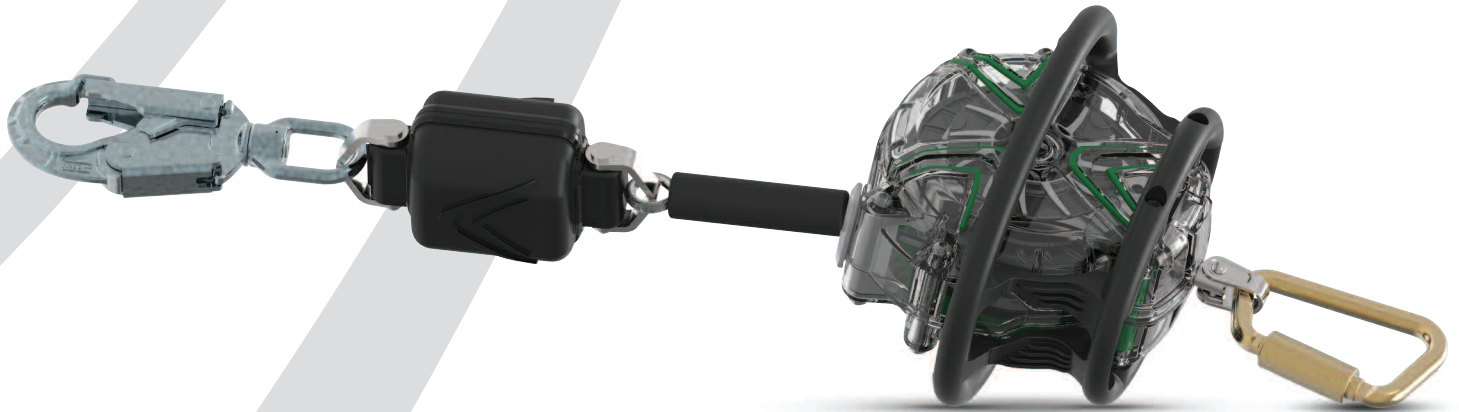


### Simplify Selection

Use in a variety of applications, from overhead to horizontal tie off points, and where leading edges are a concern.



### Lower Cost of Ownership

Integrated roll cage provides additional protection to the housing when used in foot-level tie off. Retraction-dampening feature controls rate of lifeline speed, preventing unwanted damage to the unit, and maximising product longevity.



### Get to Work Faster

Clear outer casing allows for quick visual inspection of internal components



### Reduce Downtime

Internal components like the cable and energy absorber can be replaced on site—reducing repair lead times.

## Ordering Information

Part Number	Line Length	Line Type	Anchorage Connection	Harness Connection	Standards		
					OSHA	ANSI	EN
63406-00AEU	6 m (20 ft.)	Galvanized Cable	Steel Swivel Snaphook	Twist Lock Carabiner	■	■	■